

## PATENT ABSTRACTS OF JAPAN

(11)Publication number : 56-014732  
 (43)Date of publication of application : 13.02.1981

(51)Int.CI.

H04B 1/48  
H03K 17/00

(21)Application number : 54-091229  
 (22)Date of filing : 17.07.1979


(71)Applicant : MITSUBISHI ELECTRIC CORP  
 (72)Inventor : SATO SHINICHI

## (54) CHANGE-OVER CIRCUIT

## (57)Abstract:

PURPOSE: To make use of electric power of switching effectively and also to make it possible to realize operation with a single electric power source by incorporating a transistor switch circuit in the switching control circuit of a high-frequency change-over circuit.

CONSTITUTION: In transmission, a positive bias is supplied to transmitting bias terminal VT and receiving bias terminal VR is held at zero voltage. Electric current from terminal VT flows through resistance R1, choke coil L1, diode D1, coil L2, transistor TR1 and light emission diode D2 in sequence. Further, diode D2 turns off since transistor TR2 turns off. In reception, terminal VT is held at zero voltage and terminal VR is applied with the positive bias. By way of TR2, coil L3, diode D2 and coil L2, bias current from terminal VR is accumulated in capacitor C4 and then supplied to reception part RX.

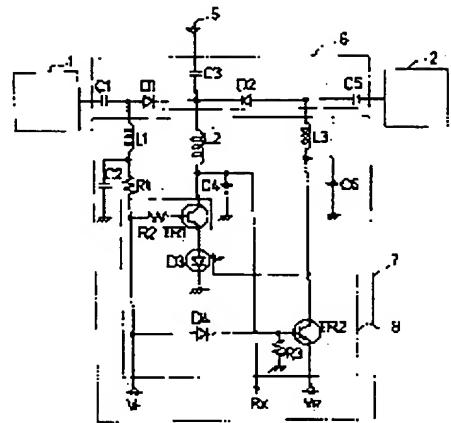

## LEGAL STATUS

[Date of request for examination]

[Date of sending the examiner's decision of rejection]

[Kind of final disposal of application other than the examiner's decision of rejection or application converted registration]

[Date of final disposal for application]

[Patent number]

[Date of registration]

[Number of appeal against examiner's decision of rejection]

[Date of requesting appeal against examiner's decision of rejection]

[Date of extinction of right]

Copyright (C) 1998,2003 Japan Patent Office

BEST AVAILABLE COPY